


XK103450

Items		Norminal	Remark
Capacity	Typ.	1850mAh	0.2CmA(360mA) discharge
	Min.	1800mAh	
Voltage		3.7V	
Internal Resistance		≤35mΩ	
Power Off Voltage		2.75V	
Charging Current		1800mA	Standard charging
Maximum Charging Voltage		4.25V	
Charging Time		about 2.5h	1800mA charging
Maximum Charging Current		2700mA	1.5CmA
Maximum Disharge Current		3600mA	2.0CmA
Approximate Weight		about 36.2g	
Operating Temperature and Humidity	Charging	0~+45°C	
	Discharge	-20~+60°C	
Storage Temperature	<1 month	-20~+45°C	Recommended storage temperature during transportation is at 23°C
	>6 months	-20~+35°C	

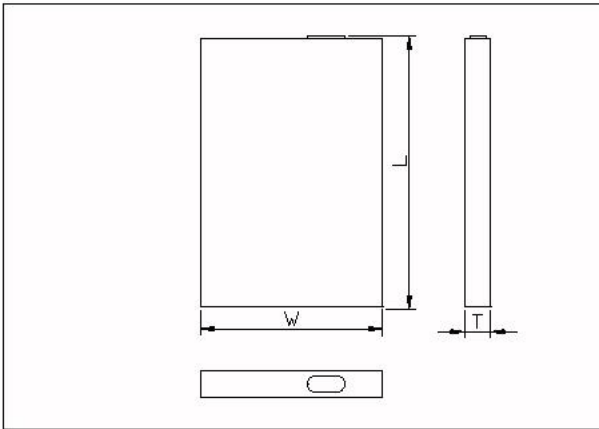

Demension	Unit
T (MAX)	10.5mm
W (MAX)	34.3mm
L (MAX)	50.3mm

T: Thickness
W: Width
L: Length

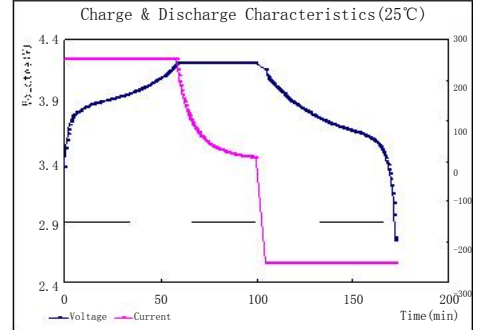


Figure 1 Charge & Discharge Characteristic

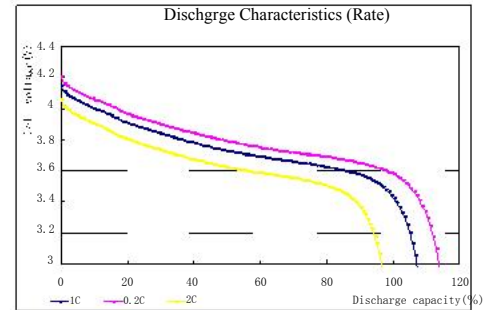


Figure 2 Discharge Characteristic

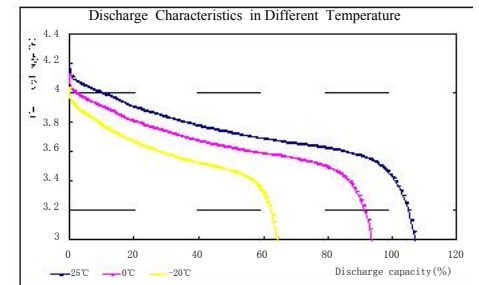


Figure 3 Discharge Characteristic in Different T

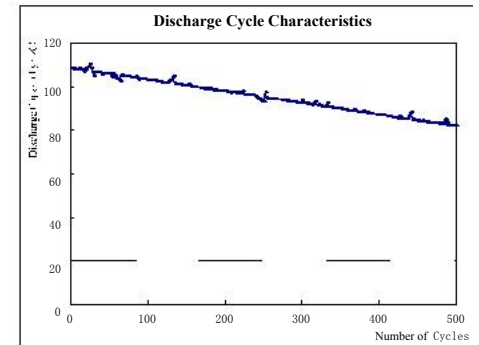


Figure 4 Discharge Cycle Characteristic